

08.11.2004



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03257429.5

RECEIVED	
18 NOV 2004	
WIPO	PCT


**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

[Signature]
B.C. van Dijk
[Signature]
C. v.d. Aa-Jansen



BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 03257429.5
Demande no:

Anmeldetag:
Date of filing: 25.11.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

UNILEVER PLC
Unilever House,
Blackfriars
London EC4P 4BQ
GRANDE BRETAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Method for dispensing ice cream

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

A23G/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

25 NOV 2

RECEIVED

Method for dispensing ice cream

5 Technical field of the invention

This invention relates to a method for dispensing ice cream products. The invention particularly relates to a method for dispensing soft ice cream.

10

Background

It has been proposed to dispense ice cream from large containers in individual portions by, for example, hand operation using scoops. It has also been proposed to dispense ice cream from machines as by soft serve machines in which the product is mixed, and frozen, or by dispensing machines in which pre-packaged ice cream is delivered from an ice cream container.

20 Conventional soft ice is dispensed from a semi-continuous, pressurised scraped surface heat exchanger (SSHE) at temperatures of -4 to -9°C. The rheology of ice cream and the shear provided by the SSHE are such that a pressure of a few atmospheres is sufficient to dispense the ice cream at an acceptable rate. Unfortunately, SSHEs are large and expensive, require power, training to operate, do not deliver consistent product quality if used over a period of time and are difficult to dismantle & clean for the operator. Each SSHE can also only offer one type of product (e.g. flavour/ice cream/sorbet etc) at a time - separate barrels are required for different products.

35 All these known systems are limited by one or more factors such as expensive machinery, slow rate of dispensing, narrow range of product, deterioration of bulk product not used, consistency of portion control, limited flavour selection etc.

- 2 -

Other, more recent dispensing systems use 'cartridges' of ice cream that must be kept at frozen temperatures (often higher than regular deep freeze temperatures of -18 to -22°C) locally separate to the dispensing system. Here the ice cream is not under pressure and
5 therefore the volume in the cartridge is at most the volume of product dispensed, therefore systems take up a bigger footprint. Such dispensing systems are for example described in WO91/01090.

There is therefore a need for a portable business system that
10 supplies multi-portion freshly-dispensed where no power is available locally in a compact, easy to use, hygienic system. The compressed format of the system means the capacity to deliver higher volumes of product for the same stored volume compared to other pre-frozen, aerated products.

15

Tests and definitions.

Average molecular weight

20 For the purposes of this patent, the average molecular weight for a mixture of freezing point depressants (fpds) is defined by the number average molecular weight $\langle M \rangle_n$ (equation1). Where w_i is the mass of species i , M_i is the molar mass of species i and N_i is the number of moles of species i of molar mass M_i .

25

$$\langle M \rangle_n = \frac{\sum w_i}{\sum (w_i / M_i)} = \frac{\sum N_i M_i}{\sum N_i}$$

Freezing point depressants

30 Freezing point depressants (fpds) as defined in this invention consist in:

- 3 -

- monosaccharides and disaccharides
- Oligosaccharides containing from 3 to ten monosaccharide units joined in glycosidic linkage.
- Corn syrups with a dextrose equivalent (DE) of greater than 20 preferably > 40 and more preferably > 60. Corn syrups are complex multi-component sugar mixtures and the dextrose equivalent is a common industrial means of classification. Since they are complex mixtures their number average molecular weight $\langle M \rangle_n$ can be calculated from the equation below. (Journal of Food Engineering, 33 (1997) 221-226)

$$DE = \frac{18016}{\langle M \rangle_n}$$

- Erythritol, arabitol, glycerol, xylitol, sorbitol, mannitol, lactitol and malitol.

Definition of overrun.

Overrun is defined by the following equation

$$OR = \frac{\text{volume of ice cream} - \text{volume of premix at ambient temp}}{\text{volume of premix at ambient temp}} \times 100$$

It is measured at atmospheric pressure.

25 Brief description of the invention

It is the object of the invention to provide a method of dispensing an ice cream product comprising filling a container with an ice cream product, transporting the container from the site of filling to a site at which the ice cream product is to be dispensed, locating the container in a dispensing apparatus, and discharging ice cream product in the container through an outlet of the container, characterised in that the container has at least two compartments (A) and (B), said

compartments being gas-tightly separated from each other by an at least partially movable wall, compartment (A) containing a propellant and compartment (B) containing the ice cream product, compartment (B) being provided with a valve.

5

By using pre-energised containers, it is possible to apply the method according to the invention in locations where no electrical power is available to dispense the manufacture and dispense ice cream.

10

Preferably, the filling of the container takes place by introducing the propellant into compartment (A), up to where a pressure of at between 1 barg and 10 barg is reached, then the frozen aerated product is introduced into compartment (B) until a pressure of

15 between 5 barg and 12 barg, preferably above 8 barg, is reached.

Preferably also, the ice cream product contains freezing point depressants in an amount of between 20% and 40% w/w, preferably above 25%, and between 0% and 15% fat, preferably between 2% and 12%,

20 the freezing point depressants having a number average molecular weight $\langle M \rangle_n$ following the following condition:

$$\langle M \rangle_n \leq -8 \text{ FAT} + 330$$

25 wherein FAT is the fat level in percent by weight of the product.

More preferably, the freezing point depressants are made at least a level of 98% (w/w) of mono, di and oligosaccharides.

30 More preferably also, the dispensing apparatus is equipped with thermal insulation means which surrounds each ice cream container and which maintains product temperature below -15°C for up to 8 hours. It allows for locating the dispensing apparatus in places wherein no electrical power is available to maintain the temperature

- 5 -

of the ice cream product. In an alternative preferred embodiment,
the dispensing apparatus is equipped with an insulated casing for
example made of insulating foam, or comprising insulating foam
panels and the ice cream containers are partially covered by a
5 generally cylindrical casing made of eutectic plates.

Preferably, the dispensing apparatus is designed to releasably hold
one or more containers vertically inverted (i.e. with the valve at
the bottom). More preferably, the dispensing apparatus is equipped
10 with a storage cabinet adapted to contain additional filled
containers.

Detailed description of the invention

15 The present invention will be further described with reference to
the drawings wherein;

Figure 1 is a schematic view of a dispensing unit for operating the
process of the invention.

20

Figure 2 is a schematic partial view of the upper part of a
dispensing unit for operating the process of the invention, together
with an ice cream container about to be introduced into the
dispensing unit.

25

Figure 3 is a schematic cross section of an ice cream container used
in the process of the invention.

Figure 4 is a schematic cross section of another ice cream container
30 used in the process of the invention.

As can be seen on figures 1 and 2, a dispensing unit 10 comprises an
upper part 11 adapted to vertically hold individual ice cream
containers 20 in wells 12, these wells can be thermally insulated.

- 6 -

This upper part 11 is supported by a frame 13 which is adapted to be fitted on existing tables or countertops. These insulated wells 12 can be in the form of a generally cylindrical envelope preferably containing a eutectic solution. At the bottom of the upper part 11 is located, under each insulated well 12, actuating means 13 adapted to open and shut the valve 22 of the ice cream container 20 container in said well 12.

As can be seen on Figure 3, each ice cream container 20 comprises an outer body 21 of generally cylindrical shape, equipped with a dispensing valve 22 at one end. The outer body 21 is divided in two compartments A and B said compartments being gas-tightly separated from each other by an at least partially movable wall 24, compartment (A) containing a gas under pressure (propellant) and compartment (B) containing the ice cream product, compartment (B) being provided with a valve 22. As can be seen in Figure 3, the movable wall 24 is in the form of a piston sliding against the inside wall of the cylindrical body 21, in another embodiment disclosed in Figure 4, the movable wall 24 can be in the form of a bag 25 attached to the valve 22.

The gas in compartment (A) can be air, it is typically at a pressure of between 5 barg and 12 barg at a temperature of -18 C.

A container 20 can present on its outer body 21, a thermal insulation which can be in the form of eutectic pads forming a generally cylindrical envelope. Each container contains enough ice cream to typically dispense around 10 individual doses.

In operation, ice cream containers 20, filled with different flavoured ice creams, are inserted in their respective wells 12 in the dispensing apparatus 10. On request by a customer, or by the customer himself, the actuating means 13 corresponding to the desired ice cream are operated, the valve 22 is opened and, owing to

- 7 -

the pressure in compartment A of the container, the ice cream contains in compartment B flows out of the container through valve 22 into e.g. a cup or a cone. When the desired dose has been delivered, valve 22 is shut.

25 NOV 2

RECEIVED

- 8 -

CLAIMS

1. A method of dispensing an ice cream product comprising
5 filling a container with an ice cream product,
transporting the container from the site of filling to a site at
which the ice cream product is to be dispensed,
locating the container in a dispensing apparatus, and
10 discharging ice cream product in the container through an outlet
of the container,
characterised in that the container has at least two
compartments (A) and (B), said compartments being gastightly
separated from each other by an at least partially movable wall,
compartment (A) containing a propellant and compartment (B)
15 containing the ice cream product, ~~compartment (B) being provided~~
with a valve.
2. A method according to claim 1 characterised in that the filling
of the container takes place by introducing the propellant into
20 compartment (A), up to where a pressure of at between 1 barg and
10 barg is reached, then the frozen aerated product is
introduced into compartment (B) until a pressure of between 5
barg and 12 barg, preferably above 8 barg, is reached.
- 25 3. A method according to claim 1 wherein wherein the ice cream
product contains freezing point depressants in an amount of
between 20% and 40% w/w, preferably above 25%, and between 0%
and 15% fat, preferably between 2% and 12%, the freezing point
depressants having a number average molecular weight $\langle M \rangle_n$
30 following the following condition:

$$\langle M \rangle_n \leq -8 \text{ FAT} + 330$$

35 Wherein FAT is the fat level in percent by weight of the
product.

- 9 -

4. Method to claim 3 wherein the freezing point depressants are made at least a level of 98% (w/w) of mono, di and oligosaccharides .

5

25 NOV 2003

RECEIVED BY F

- 10 -

Abstract

Ice cream is dispensed from an apparatus comprising holding means for an ice cream container under pressure. Actuating means open and
5 close on request a valve of the ice cream container, thus delivering individual portions of ice cream.

THE PATENT

25 NOV

RECEIVED

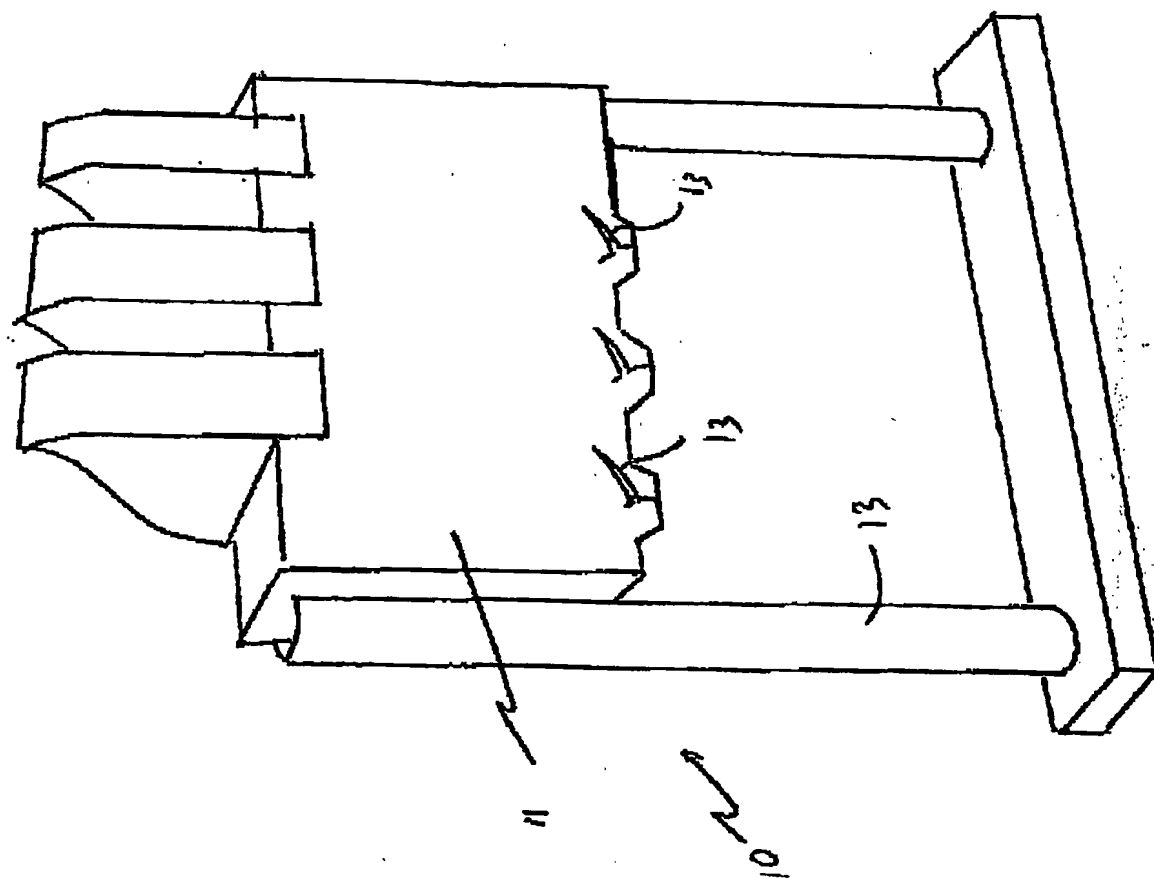
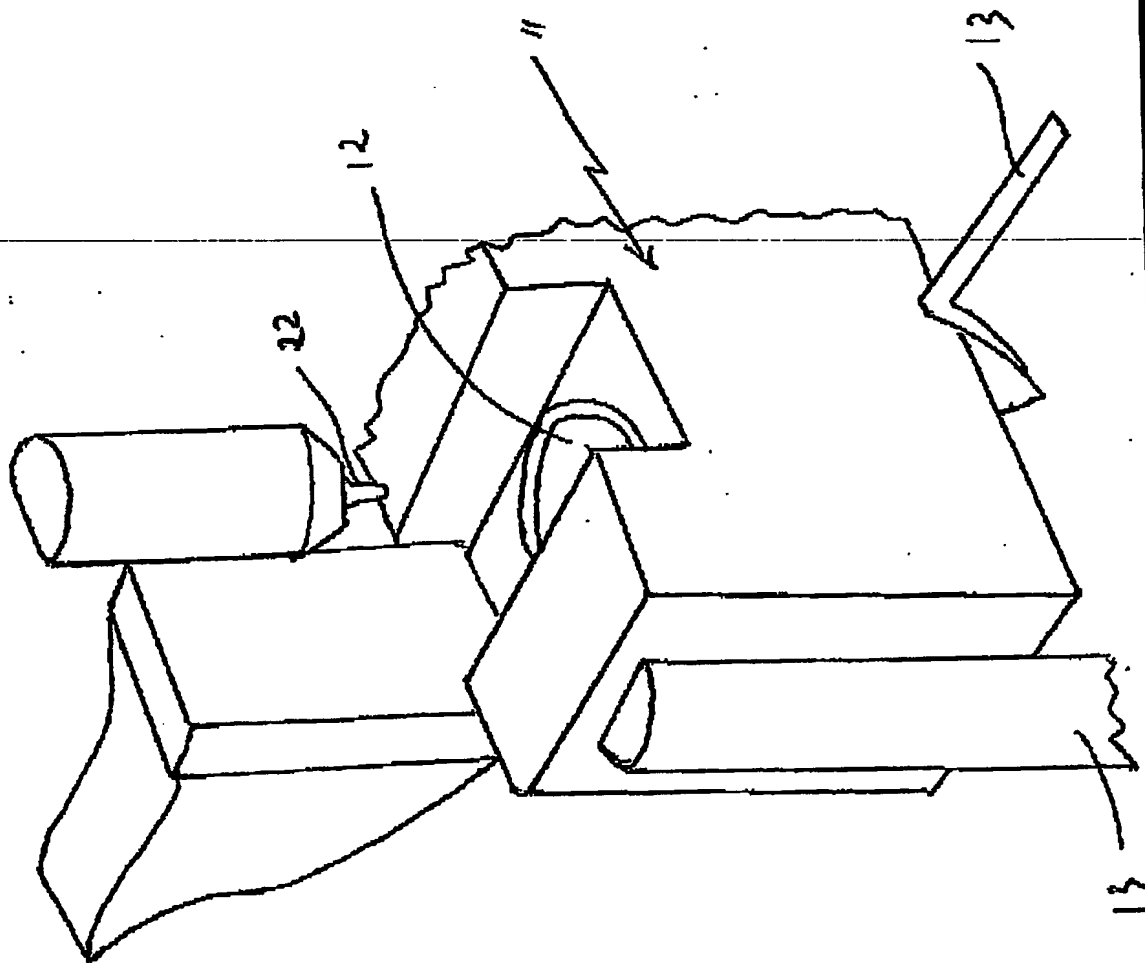


Figure 1

Figure 2



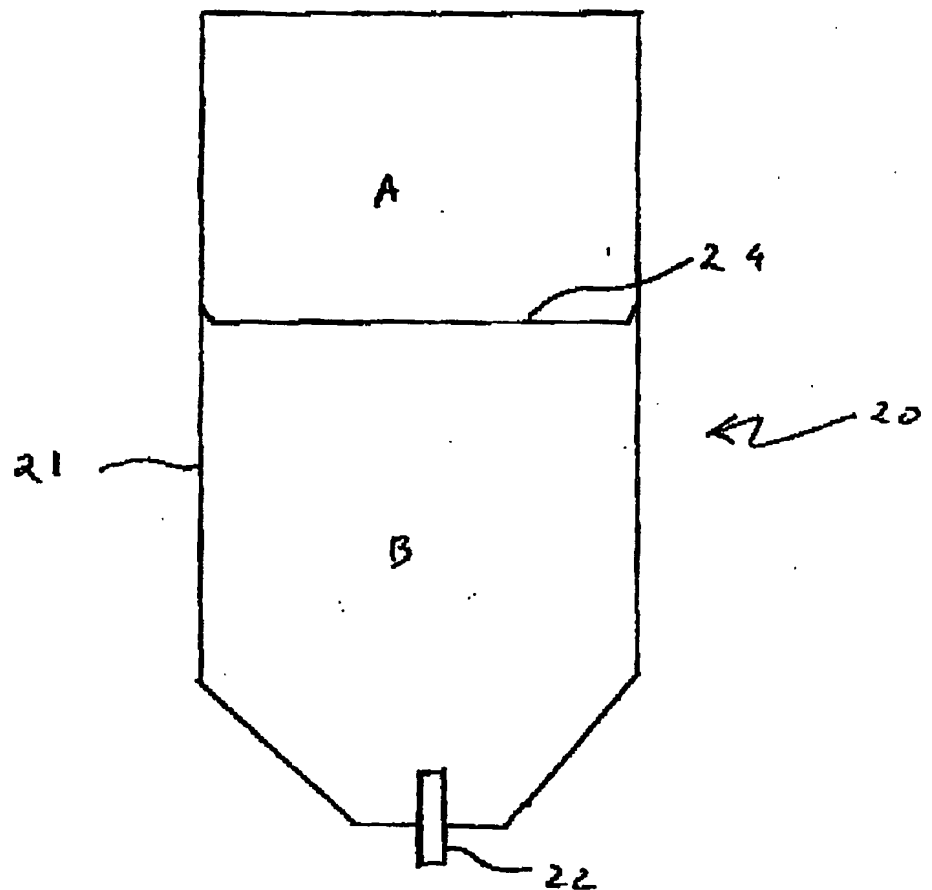


Figure 3

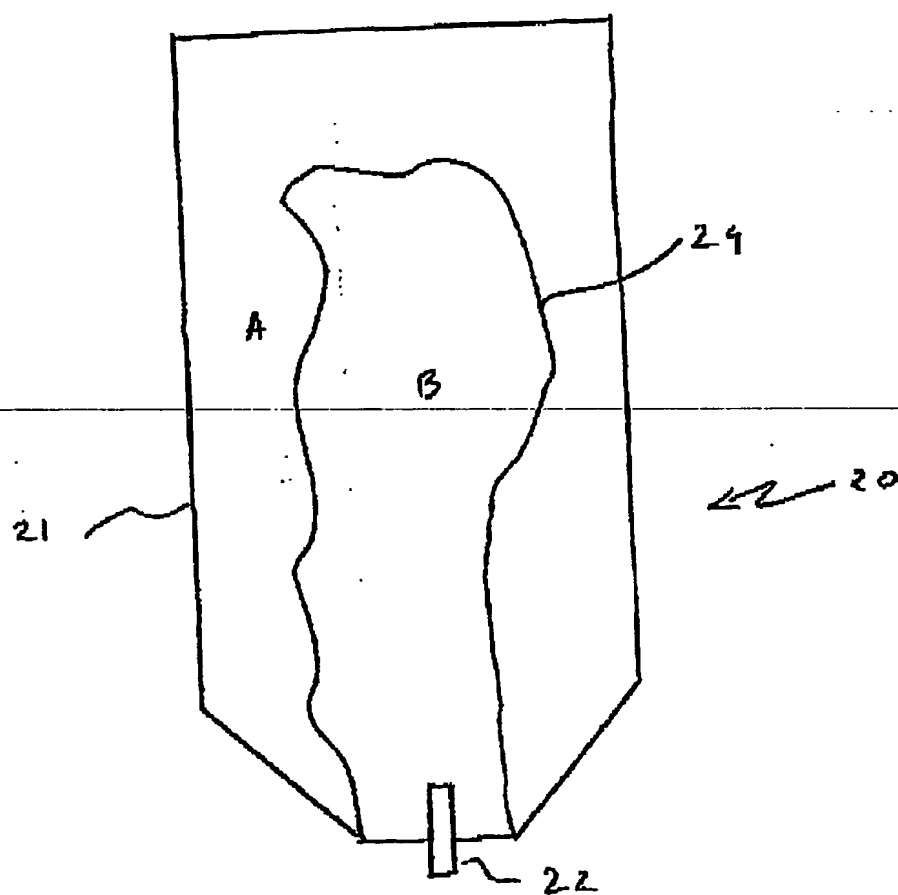


Figure 4

PCT/EP2004/011682



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.